



ELSEVIER

Nuclear Instruments and Methods in Physics Research A 456 (2000) 35–39

**NUCLEAR
INSTRUMENTS
& METHODS
IN PHYSICS
RESEARCH**
Section A

www.elsevier.nl/locate/nima

Study of RPC gas mixtures for the ARGO-YBJ experiment

B. Bartoli, R. Buonomo, E. Calloni, S. Catalanotti, B. D'Ettore Piazzoli,
G. Di Sciascio, M. Iacovacci*

*Dipartimento di Scienze Fisiche dell'Università di Napoli and INFN, Sezione di Napoli, Complesso Universitario di Monte S. Angelo,
Edificio G, Viale Cintia, Napoli, Italy*

Abstract

The ARGO-YBJ experiment consists of a Resistive Plate Counter (RPC) carpet to be operated at the Yangbajing laboratory (Tibet, China), 4300 m a.s.l., and devoted to the detection of showers initiated by photon primaries in the energy range 100 GeV–20 TeV. The measurement technique, namely the timing on the shower front with a few tens of particles, requires RPC operation with 1 ns time resolution, low strip multiplicity, high efficiency and low single counting rate. We have tested RPCs with many gas mixtures, at sea level, in order to optimize these parameters. The results of this study are reported here. © 2000 Elsevier Science B.V. All rights reserved.

PACS: 95.85.PW; 96.40.Pq; 95.55.Ka; 95.55.Vj

Keywords: Gamma-ray astronomy; Extensive air shower; ARGO-YBJ; RPCs

1. Introduction

The ARGO-YBJ experiment [1] is under way over the next few years at the Yangbajing High Altitude Cosmic Ray Laboratory (4300 m a.s.l., 606 g/cm²), 90 km North to Lhasa (Tibet, China).

The aim of the ARGO-YBJ experiment is the study of fundamental issues in cosmic ray and astroparticle physics including γ -ray astronomy, GRBs physics at 100 GeV threshold energy and the measurement of the antip/p at TeV energies.

The apparatus consists of a full coverage detector of dimension 71 × 74 m² realized with a single layer

of Resistive Plate Counters (RPCs). A guard ring partially (about 50%) instrumented with RPCs, surrounds the central detector, up to 100 × 100 m²; it improves the apparatus performance by enlarging the fiducial area for the detection of showers with the core outside the full coverage carpet.

A lead converter 0.5 cm thick will cover uniformly the RPC plane in order to increase the number of charged particles by conversion of shower photons and to reduce the time spread of the shower particles.

The measurement technique, namely the timing on the shower front with a few tens of particles, requires RPC operation with 1 ns time resolution, low strip multiplicity for good energy estimation at low energies, high efficiency and low single counting rate to trigger efficiently at low multiplicity.

*Corresponding author. Tel.: +39-081-676128; fax: +39-081-676246.

E-mail address: iacovacci@na.infn.it (M. Iacovacci).

Keeping in mind all these needs and the low operating pressure (about 600 mbar) at Yangbajing we started to investigate different

gas mixtures, at sea level, in order to optimize the detector performance. In fact, previous studies have shown that the performance of the

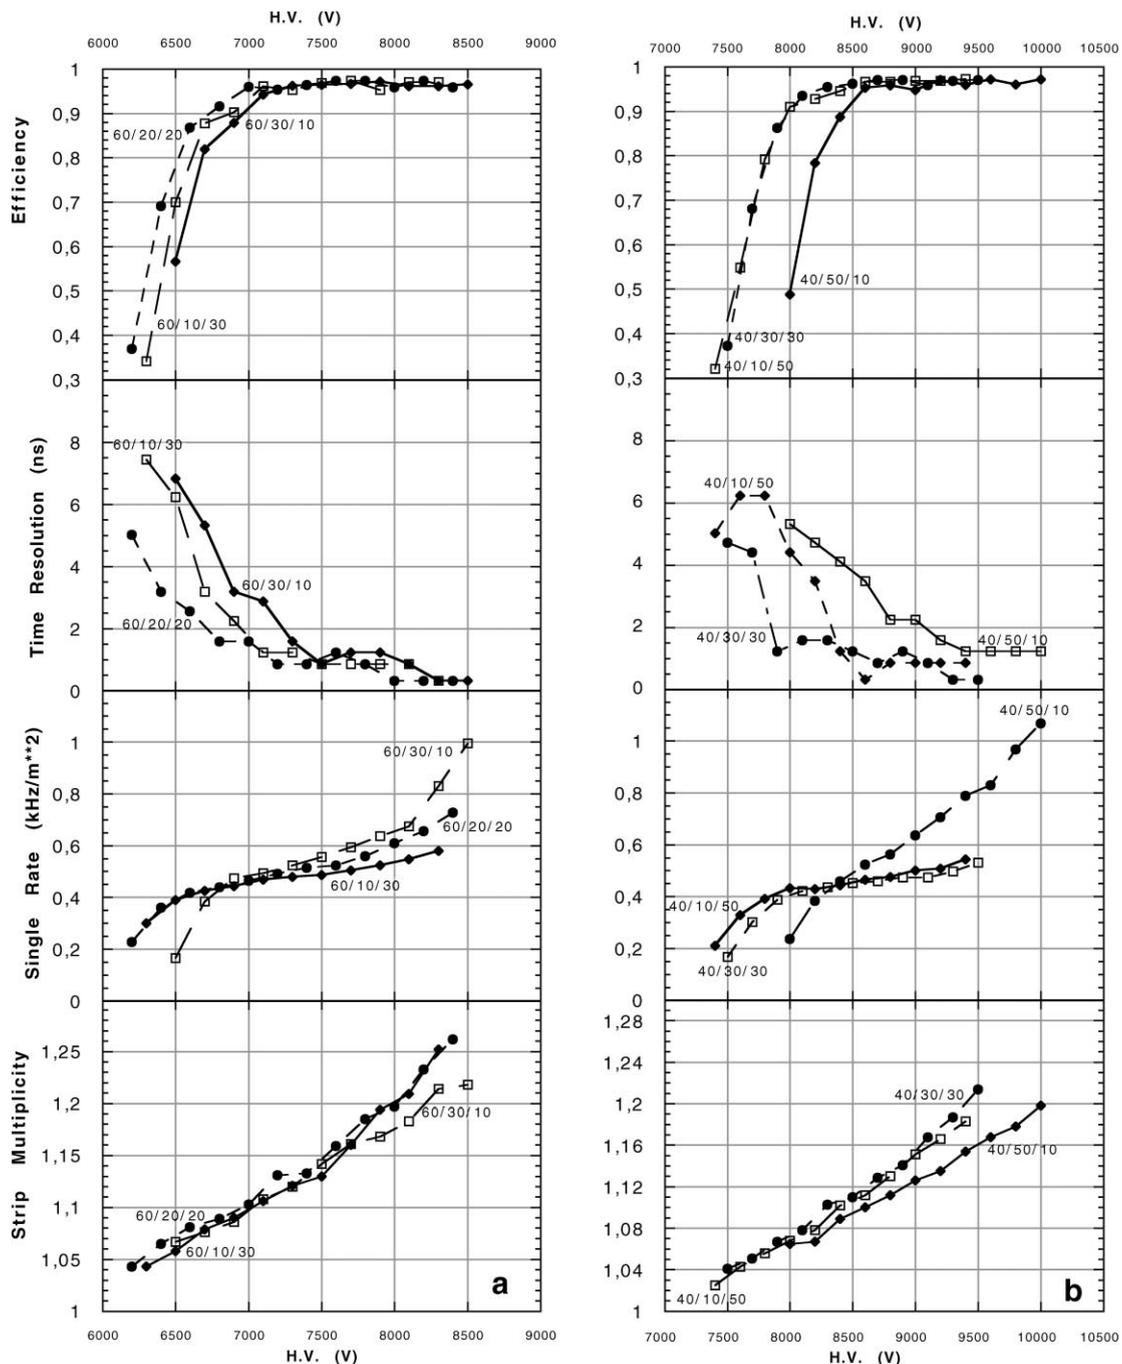


Fig. 1. Efficiency, time resolution, single rate and mean strip multiplicity for gas mixtures with (a) 60% of Ar; (b) 40% of Ar.

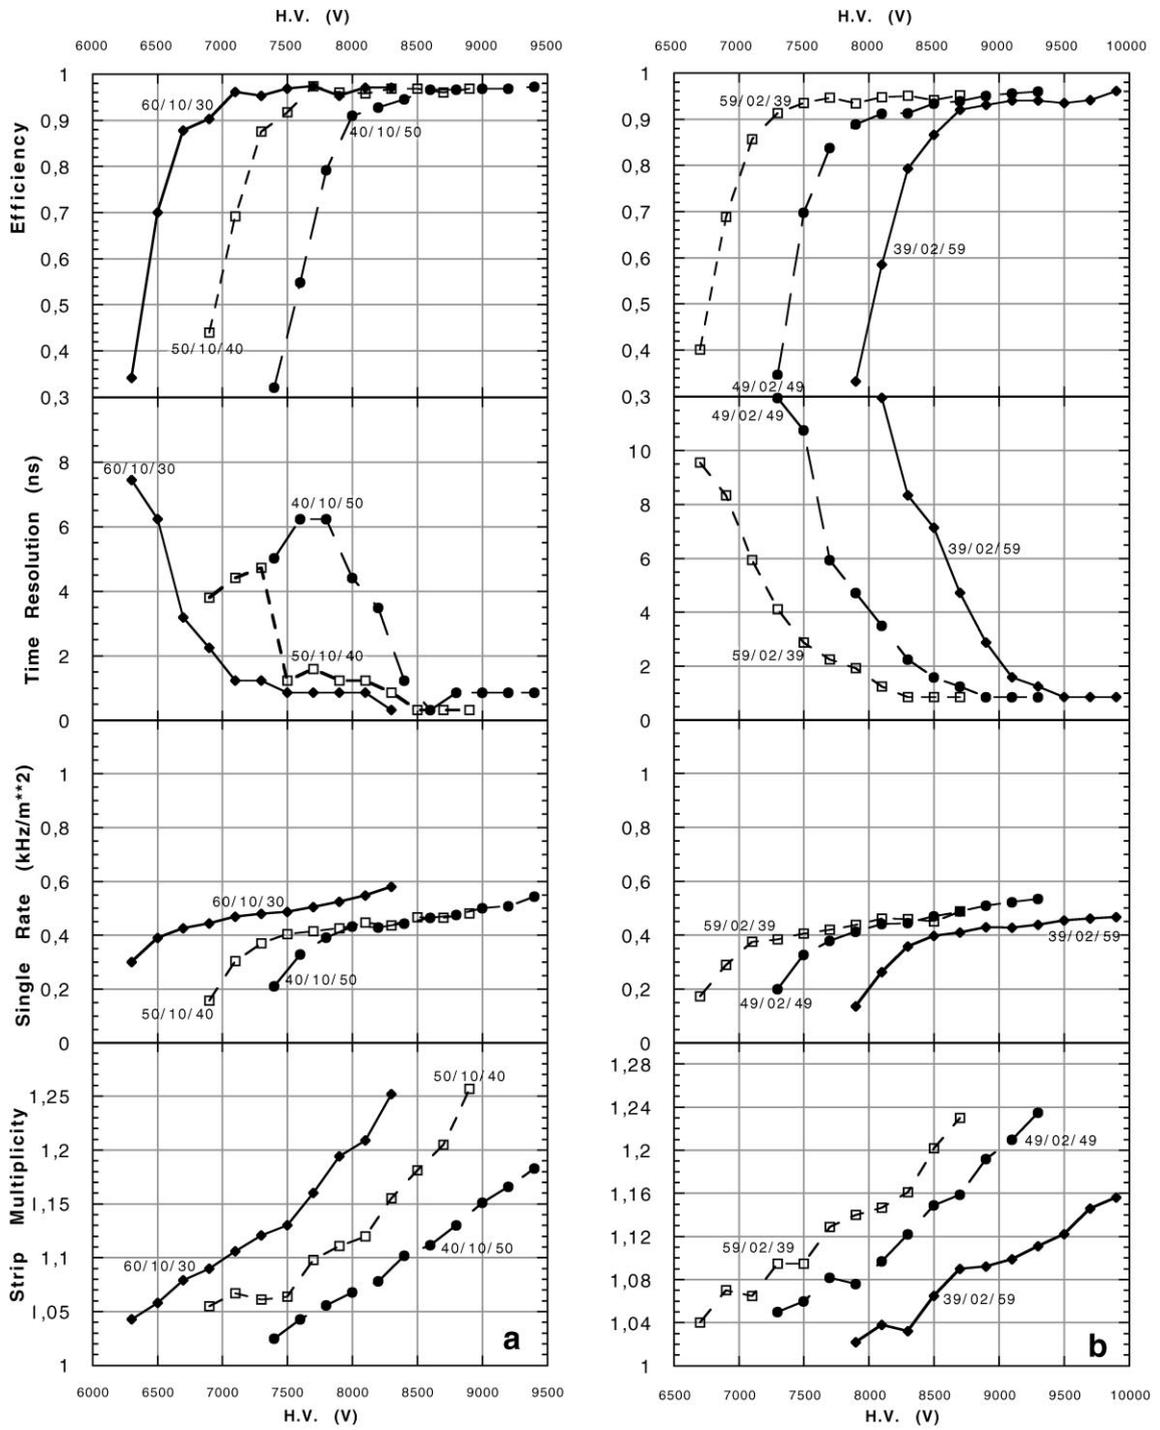


Fig. 2. Efficiency, time resolution, single rate and mean strip multiplicity for gas mixtures with (a) 10% of i-But; (b) 2% of i-But.

detector may be heavily affected by the reduced pressure [2].

Three gas components were used: argon, iso-butane C_4H_{10} and tetrafluoroethane $C_2H_2F_4$ that will be indicated in the following as Ar, i-But and TFE, respectively.

The set-up used for this study consists of a small telescope of four RPCs $50 \times 50 m^2$ area with 16 pick-up strips 3 cm wide connected to the front-end electronics board. The front-end circuit contains 16 discriminators, with about 70 mV voltage threshold, and provides a FAST-OR signal with the same input-to-output delay (10 ns) for all the channels. The four RPCs were overlapped one over the other, three out of them were used to define a cosmic ray beam by means of a triple coincidence of their FAST-OR signals, the fourth one was used as test RPC. The three RPCs providing the trigger were operated with a gas mixture of 60% Ar, 37% i-But and 3% TFE.

At any trigger occurrence the time provided by the test RPC was read by means of a LECROY TDC of 0.25 ns time bin, operated in common START mode; the number of fired strips was read by means of a CAEN module C187. The single counting rate was read by a CAEN scaler C243.

2. RPC performance

The RPCs were operated in streamer mode, as foreseen for the experiment, at the ARGO laboratory of the Physics Department of the Naples University. Many gas mixtures have been tested, including mixtures with a high percentage of Ar (40–60%) which represent a reference point for the performance of the detector. The results are shown in Fig. 1 where in the first column (a) are reported the three mixtures with Ar kept at 60%; the numbers associated to each line like 60/30/10 refer, respectively, to Ar/i-But/TFE. It can be seen that changing the relative percentage of the two quenching components, i-But and TFE, does not result in any strong or evident difference of the detector performance. In fact, the operating voltage does not change substantially, neither the efficiency; the time resolution stabilizes around 1 ns and the strip multiplicity ranges from 1.1 to 1.3 depending on the

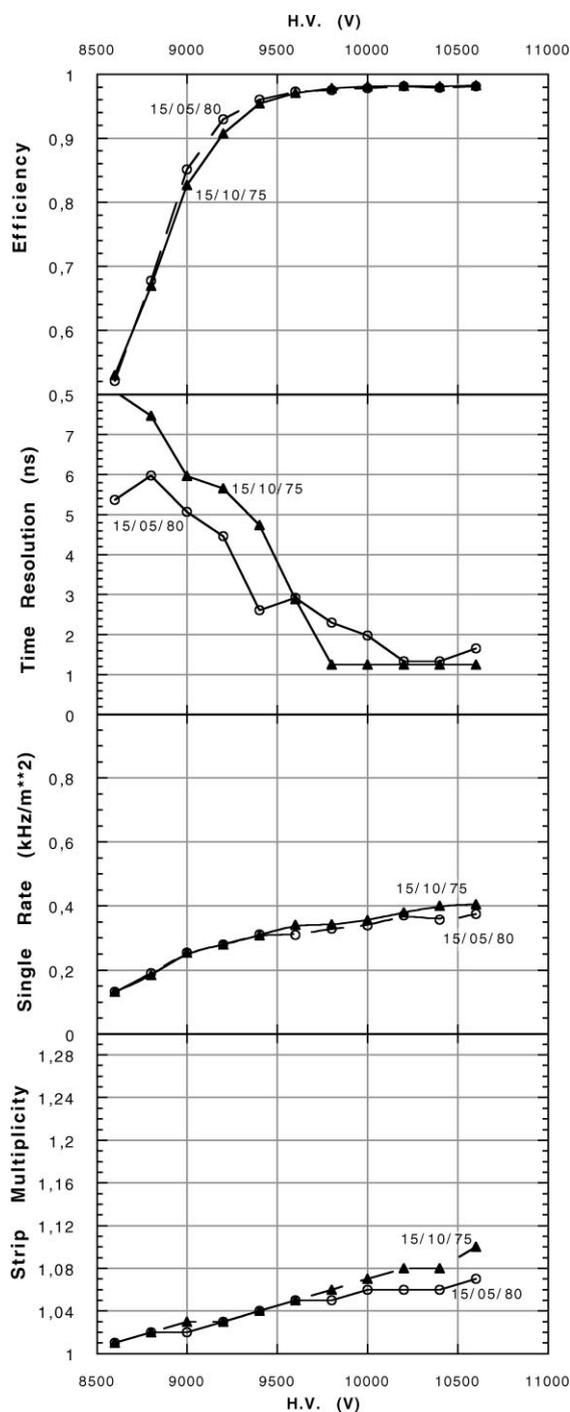


Fig. 3. Efficiency, time resolution, single rate and mean strip multiplicity for the gas mixtures Ar/i-But/TFE = 15/10/70 and Ar/i-But/TFE = 15/5/80.

applied voltage. This is confirmed by the set of measurements done with Ar kept at 40% (column b). Only the mixture 40/50/10 shows some difference, but it is likely that there was some uncontrolled change or problem during the data taking.

In order to check gas mixtures with i-But content around and below the flammability threshold (10%) we have performed measurements with mixtures where the i-But fraction was kept at 10% in one set and 2% in another set. The results are reported in Fig. 2(a) and (b). Both samples of measurements show that the Ar percentage plays an important role in defining the operating voltage (about 800 V above the knee-voltage) and influences the strip multiplicity. The mean value of the strip multiplicity remains anyway below 1.3; also the single rate changes according to the Ar percentage and this can be understood as we work at fixed discrimination threshold. Efficiency and time resolution are not affected. This means that i-But, traditionally used to “quench” the discharge by absorption of ultraviolet photons, can be substituted almost completely by TFE which is electronegative and captures electrons of the plasma.

A solution to the problem of low pressure is increasing the density of the gas mixture. An increase of TFE concentration at the expense of Ar concentration should therefore increase the primary ionization, thus compensating for the 40% reduction caused by the lower gas target pressure (600 mbar) and reduces the afterpulse probability. We have tested two mixtures with high content of TFE, namely Ar/i-But/TFE : 15/10/75 and 15/5/80; the second one is a non flammable mixture. The experimental results (Fig. 3) do not exhibit evident differences between them. The reduction of the argon concentration in favour of the TFE results in a clear increase of the operating voltage as expected from the large quenching action of TFE. The efficiency, 98%, is comparable to the values obtained with the mixtures having low percentage of TFE; might even be higher but this, given the experimental fluctuations, cannot be stated with certainty. Moreover, the time resolution does not show any worsening, the single rate keeps below 400 Hz/m²

and also the strip multiplicity stays below 1.1. The mixture 15/10/75 has been already used successfully at Yangbajing in the ARGO test [3,4].

3. Conclusions

We have studied the performance of RPCs with gas mixtures made of Ar, i-But and TFE. We checked mixtures with a high percentage of Ar, mixtures with low content of i-But, and finally mixtures with low and high percentage of TFE. For all of them, apart from those with a high percentage of TFE, we can summarize as follows: (1) the efficiency is 95–97%; (2) the voltage where the efficiency plateau starts (V_{knee}) and the working voltage (typically $V_{knee} + 800$ V), depends strongly on the Ar fraction, showing an increase of about 500 V per every 10% Ar reduction; (3) the single rate shows a plateau in the frequency range 400–600 Hz/m²; (4) the time resolution at working voltage is typically 1.0–1.3 ns; and (5) the mean value of the strip multiplicity at the working voltage is 1.15–1.25 depending on the Ar percentage. The mixtures with higher TFE content result in slightly better performance, giving 98% efficiency, lower strip multiplicity and single rate. We could not find any parameter which is able to discriminate the different mixtures. Preliminary measurements show that in mixtures with higher TFE fraction a smaller charge per track is developed. Tests are going on to investigate the analog read-out of the detector operated in streamer mode.

References

- [1] M. Abbrescia et al., Astroparticle Physics with ARGO, Proposal (1996). Download this document at the URL: www1.na.infn.it/wsubnucl/cosm/argo/argo.html
- [2] S. Natali et al., RPC performance at low pressure, in: S.P. Ratti, M. Merlo (Eds.), Proceedings of the International Workshop on Resistive Plate Chambers and Related Detectors – RPC95, Pavia, 1995.
- [3] C. Bacci et al., Nucl. Instr. and Meth. A 443 (2000) 342.
- [4] C. Bacci et al., Results from the ARGO-YBJ test experiment, Astropart. Phys. (2000), submitted for publication.